Technical Data Sheet

www.silfluosilicone.com

Silfluo LS-614

Hexaphenyldisiloxane (Solid Phenyl Silicone)

Description:

Silfluo LS-614 is Hexaphenyldisiloxane, a solid-state phenylsilicone intermediate.
The molecule contains six phenyl groups on a single Si–O–Si disiloxane backbone, with triphenylsilyl groups at each end.
The high phenyl density raises refractive index and thermal stability of derived siloxane networks relative to lower-phenyl-content analogs.
Used as end-capping agent and structural modifier in phenyl silicone resin synthesis, high-RI optical encapsulant formulation, and specialty silicone fluid preparation.

Typical Technical Properties:

Silfluo Code:	LS-614
Chemical Name:	Hexaphenyldisiloxane
Synonyms:	Di(triphenylsilyl) oxide; 1,1,1,3,3,3-hexaphenyldisiloxane
CAS No. :	1829-40-9
EINECS No. :	217-381-6
Molecular Formula:	$C_{36}H_{30}OSi_2$
Molecular Weight:	534.79
Appearance:	White granular crystal
Purity (by GC, %):	98.0 min
Bulk Density (25°C, g/cm3):	0.75
Melting Point:	225°C
Flash Point:	>200°C

Chemical Structure:

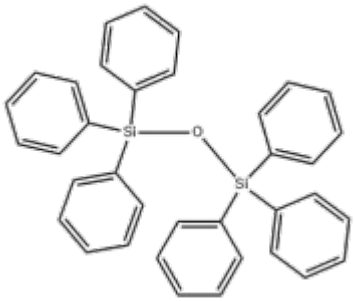

Applications:

1. High-RI optical encapsulant synthesis

Used as phenyl-rich end-capping agent in high-refractive-index silicone resin synthesis for LED packaging and optical encapsulant applications.

2. Phenyl silicone fluid end-capping

Used to terminate linear phenyl silicone chains in aerospace-grade damping fluids, diffusion pump oils, and high-temperature heat transfer fluids.

3. Electronic potting and encapsulation

The offered information of this docs is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are fully satisfactory for end use. Suggestions of use shall not be taken as inducements to infringe any patent. Please confirm with us prior to any problems.

Used as structural modifier in silicone potting compounds for high-power electronic modules requiring thermal stability and dielectric performance.

Packing

In 25kg pail and 100kg drum.

Safety and Storage

Store in a cool, dry, well-ventilated place away from direct sunlight, heat, and open flames. Keep containers tightly sealed.
Flash point >200°C; low flammability risk under normal storage and handling conditions.
Shipped as non-hazardous substance; refer to SDS before handling, storage, transport, and use.
Shelf life: 36 months from manufacture date in original unopened containers.

The offered information of this docs is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are fully satisfactory for end use. Suggestions of use shall not be taken as inducements to infringe any patent. Please confirm with us prior to any problems.